


FRXT 15i High SPL. Maximum Clarity.

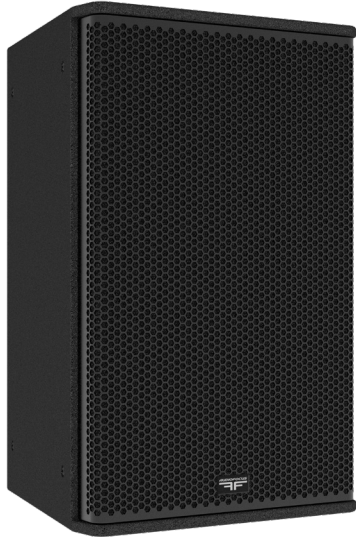

FRXT 15i is a compact, powerful bi-amplified 2-way loudspeaker, adapted from our acclaimed FRX 15 design to meet the needs of clients requiring high SPL and exceptional performance in professional stadium applications.

Our proprietary X-Comb DSP technology eliminates comb effects, ensuring perfect coupling between FRXT 15i cabinets and creating a coherent wavefront at any location. The enclosure houses a 1.4" diaphragm compression driver loaded with a 15" neodymium low-frequency transducer and offers two distinct directivity plans.

FRXT 15i can be quickly deployed in any configuration when used with AUDIOFOCUS A Series amplifiers with integral DSP and dedicated presets.

FRXT 15i is custom-built with pride in Belgium and coated in tough, weather-resistant polyurea to safeguard your investment. The cabinet front is protected by a rigid metal grill, backed by acoustically transparent foam.



Up to 3.000



80° x 30°



55Hz - 20kHz

Technical specifications


Description	2-way bi-amplified full-range installation constant curvature element
Transducers	LF: 1 x 15" • HF: 1 x 1.4" exit compression driver / voice coil diameter 1.75"
Frequency range (-6dB)	55Hz-20 kHz
Nominal directivity (-6dB)	80°x30° • Rotatable horn, no tools needed
SPL max	141.5 dB
Processing	Dedicated AUDIOFOCUS and Powersoft Armonia presets
Rigging	M8 threaded inserts Optional bracket and rigging hardware available
Connectors	2 x 4-point speakON
Nominal Impedance	LF: 8ohm • HF: 8ohm
Watt AES/peak	LF: 600/2400W • HF: 80/320W
Dimensions (H x W x D)	680 x 429 x 437 mm • 26.77 x 16.88 x 17.20 inches
Weight	33,5kg / 73.85lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

Accessories

Cluster plate for 2 FRXT 15i




Small rigging plate

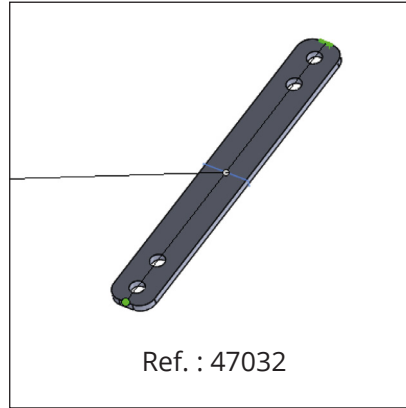

Large rigging plate



Horizontal yoke rotatable
For truss or wall

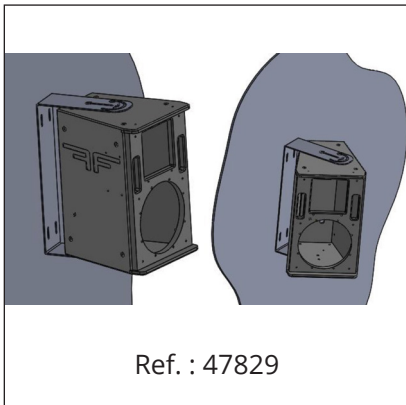

Eyebolt M8, DIN 580 - 0.14t
WLL




Subwoofers

S 21i
Touring high performance
compact 21" subwoofer




MTSub 218i
Install High performance 2 x 18"
subwoofer

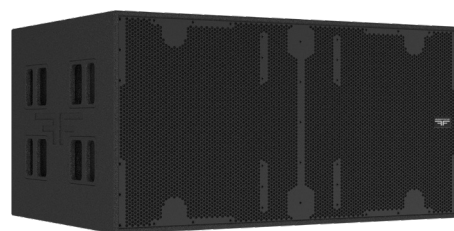


Beamwidth

FRX 15Ti Horizontal beamwidth

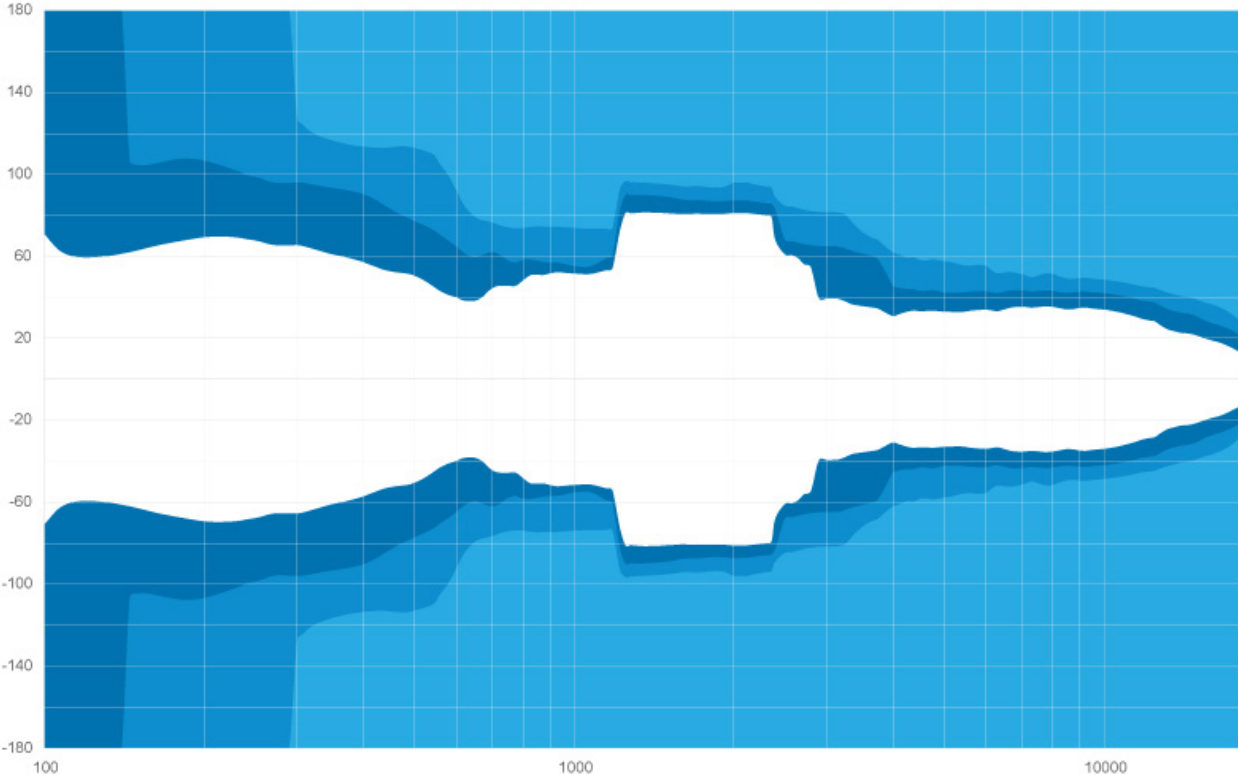

FRX 15Ti Vertical beamwidth

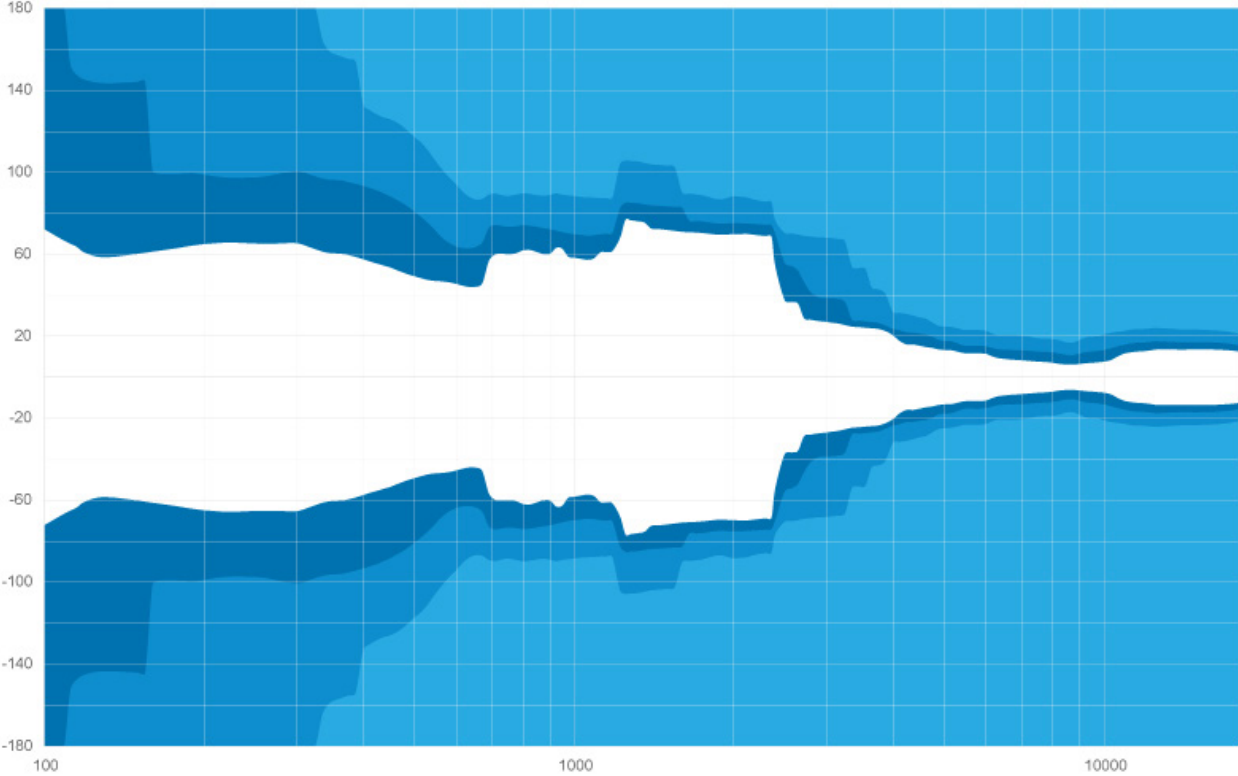

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the FRXT 15i product's web page.



Follow Us.

