


MTSub 218i State-of-the-art sub

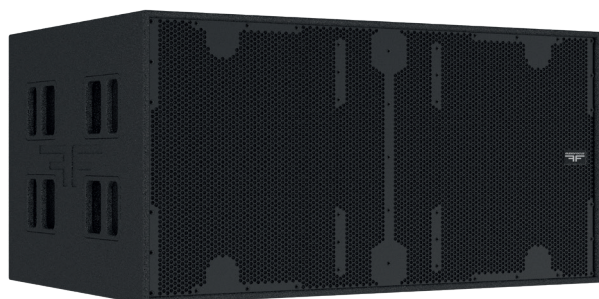

MTSub 218i is a powerful, state-of-the-art passive subwoofer, designed to complement our FR-X and ARES series in theatres, performance venues, houses of worship, and other installations requiring excellent audio quality at a real-world price point.

The MTSub 218i subwoofer houses two long-excursion 18" neodymium drivers in a bass-reflex design and delivers outstanding SPL in stand-alone or stacked configurations.

MTSub 218i can be quickly deployed in any configuration, including cardioid and end-fire, when used with AUDIOFOCUS A Series amplifiers. Armonia presets are also available for Powersoft amplifiers.

MTSub 218i is built with pride in Belgium and coated in tough, weather-resistant polyurea to safeguard your investment. The cabinet front is protected by a rigid metal grill, backed by acoustically transparent foam.



Up to 20.000



Complete solution



Omni and Cardioid



38Hz-110 Hz

Technical specifications


Description	High power installation subwoofer
Transducers	LF: 2 x 18"
Frequency range (-6dB)	38Hz-110 Hz
Peak SPL (1)	140 dB
Processing	Dedicated AUDIOFOCUS and Powersoft Armonia omni and cardioid presets
Connectors	2 x 4-point speakON
Nominal Impedance	4ohm
Watt AES/peak	1200/4800W
Dimensions (H x W x D)	1200 x 605 x 800 mm • 47.24 x 23.81 x 31.49 inches
Weight	89,5kg / 197.31lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

(1) Peak level measured at 1 m under free field conditions using pink noise with crest factor 5

Related Speakers

ARES 8i

Install 2-way line array loud-speaker



Ref. : 48113

FRX 15i

Installation high performance
2-way bi-amp constant curvature



Ref. : 48117

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the MTsub 218i product's web page.



Follow Us.

