


ARROCC CC210Nix

Narrow coverage 2×10" constant curvature installation loudspeaker



Medium throw

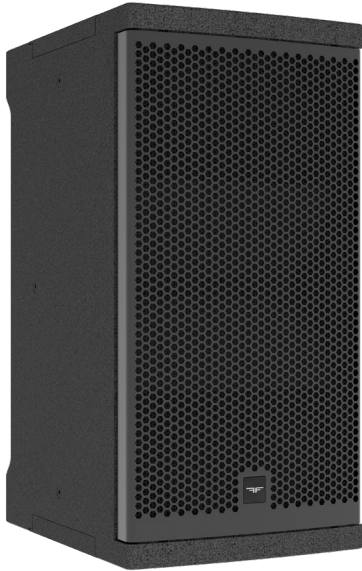

90/70° x 12.5°



55Hz - 19kHz

ARROCC CC210Nix is a narrow-dispersion constant-curvature loudspeaker designed for medium-throw installations. Combining high SPL and precise directivity with ease of installation and cost efficiency, the ARROCC series occupies a sweet spot between conventional line array and point source systems for mid-sized venues.

CC210Nix mounts twin 10" LF transducers in a V formation, and features Tetracoil Double Voice Coil technology for exceptional power, control, impulse response, and transient handling. A large, next-generation 4" HF compression driver with a titanium diaphragm delivers superior linearity and mid-band clarity.


A horn plug option allows the CC210Nix's 90° x 12.5° coverage to be adjusted to 70° x 12.5°. Ultra-precise directivity is ensured by a 3D-printed SEVERIN waveguide, delivering an optimal listening experience across the audience.

CC210Nix can be paired with wide-dispersion CC210Wix cabinets and 118SG subwoofers for fast, simple system design. Discreet rigging options allow ARROCC systems to be flown horizontally and vertically or mounted to walls and ceilings.

ARROCC CC210Nix is built with pride in Belgium.

Technical specifications

Description	Narrow coverage 2x10" passive constant curvature loudspeaker for fixed installation
Transducers	LF: 2x10" • HF: 1x1.5" exit compression driver / voice coil diameter 4"
Frequency range (-6dB)	55Hz - 19kHz
Nominal directivity (-6dB)	90°x 12.5° • External plate option for 70° coverage
Peak SPL (1)	135 dB
Processing	Dedicated AUDIOFOCUS A series and Powersoft Armonia presets
Rigging	Vertical mounting mini beam, hanging bracket
Connectors	2 × 4-point speakON
Nominal Impedance	8 ohm
Watt AES/Peak	860/3440W
Dimensions (H x W x D)	626 x 323 x 440mm • 25 x 12,7 x 17 inches
Weight	32kg / 71lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

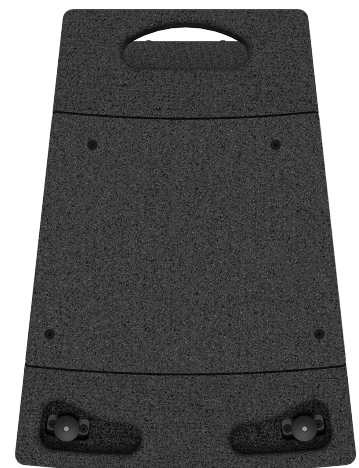

(1) Mtone 12 dB crest factor

Subwoofer

118SG

Ground stack 18" passive subwoofer



Ref. : 48556

Amplifiers

A 1504 SCiO

4 x 1500W amplifier with DSP



Ref. : 48186

A 3004 SCiO

4 x 3000W amplifier with DSP



Ref. : 48188

Accessories

48626 CC210N Horn Plug

48735 210i Mini Beam

48736 210i U Bracket

48737 T-Bar

2 x adjustable magnetic plugs to narrow CC210N directivity pattern by 10° per plug

Mini beam for 2x CC210 installation for vertical mounting

U-bracket for horizontal suspension, 4x CC210i (max)

Multi-purpose H+V Directivity control bar



Ref. : 48735





Ref. : 48736





Ref. : 48737

Beamwidth

ARROCC CC210Nix 90° beamwidth

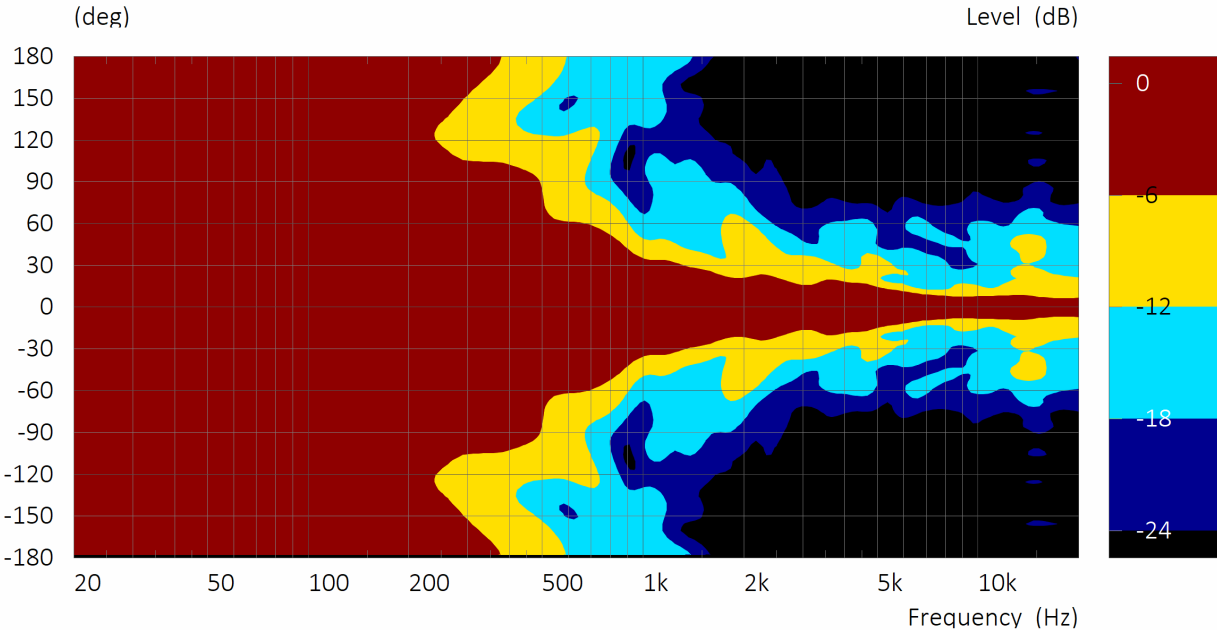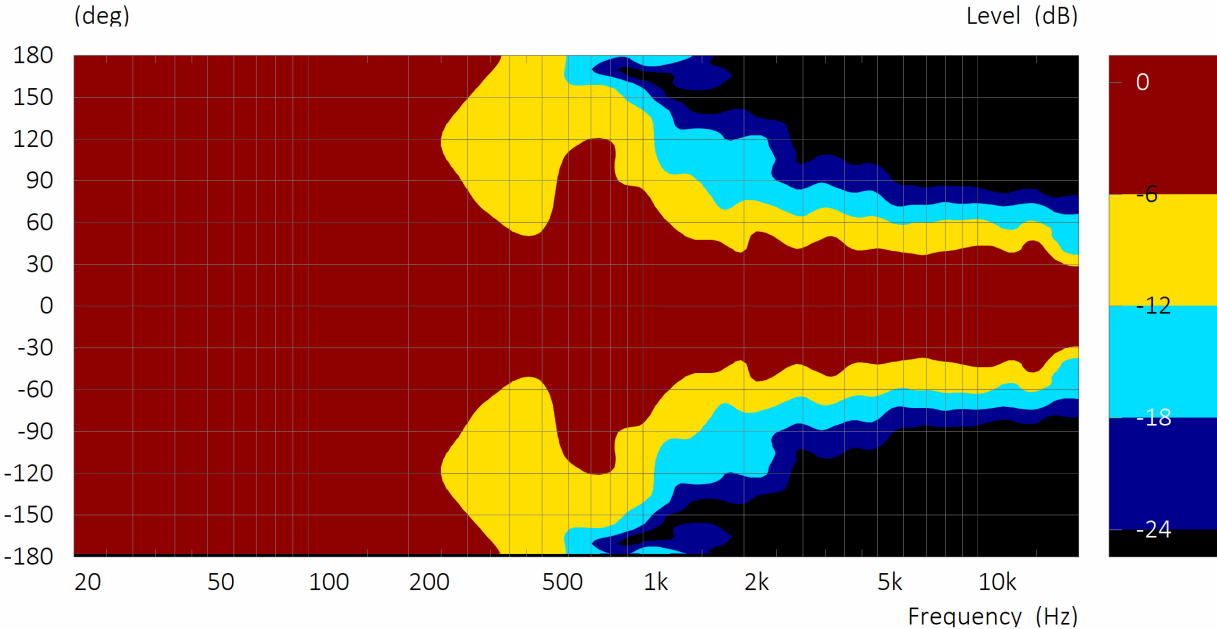

ARROCC CC210Nix 70° beamwidth

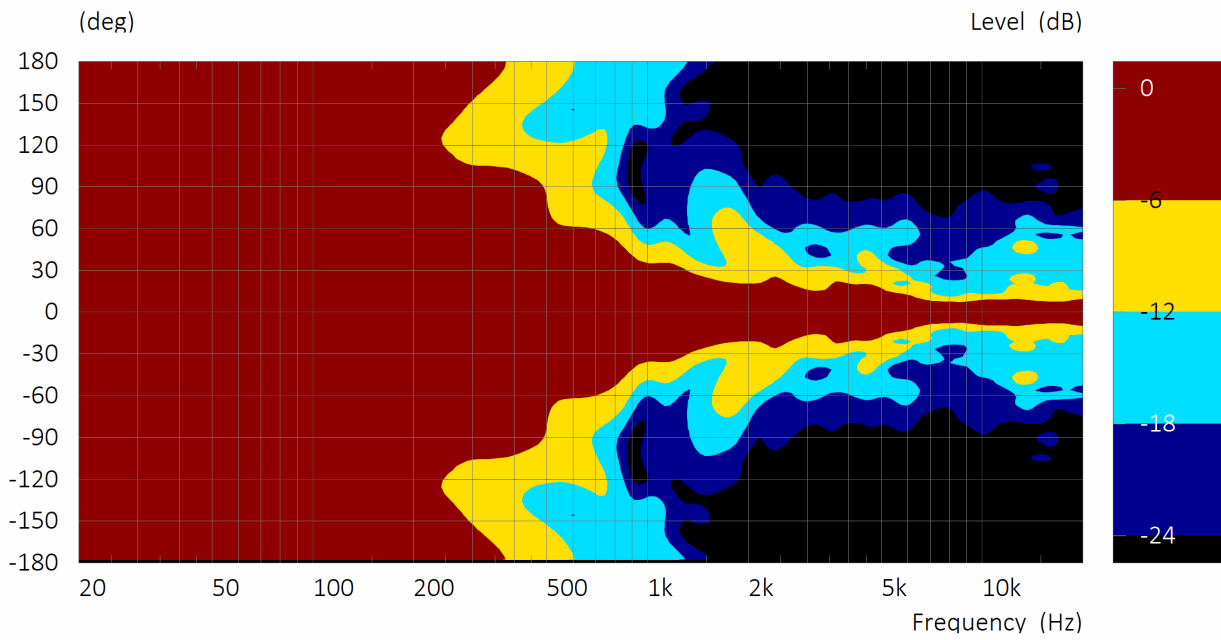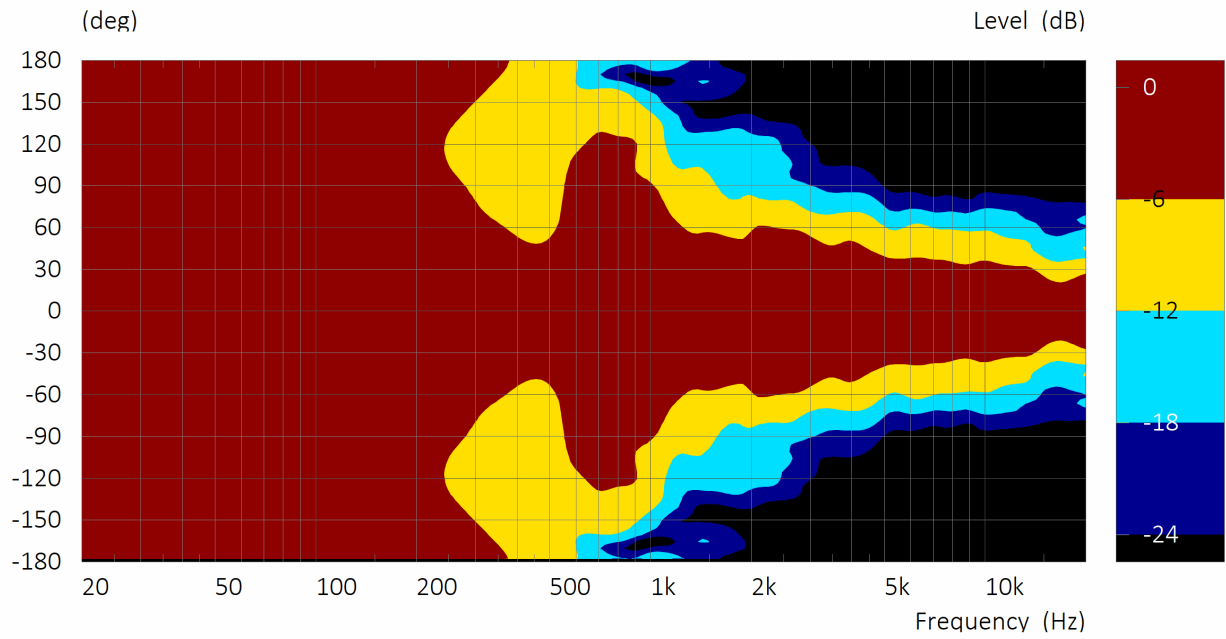

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

linkedin.com/company/audiofocus/

Scan QR Code to view the ARROCC CC210Nix web page:

