



# ARROCC CC210Wix

Wide coverage 2x10" constant curvature installation loudspeaker

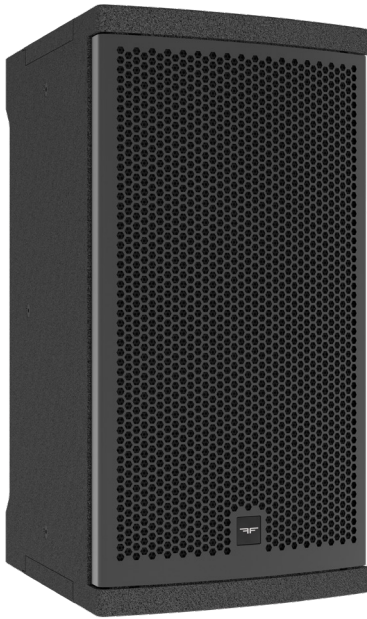

ARROCC CC210Wix is a wide-dispersion constant-curvature loudspeaker designed for medium-throw installations. Combining high SPL and precise directivity with ease of installation and cost efficiency, the ARROCC series occupies a sweet spot between conventional line array and point source systems for mid-sized venues.

CC210Wix mounts twin 10" LF transducers in a V formation, and features Tetracoil Double Voice Coil technology for exceptional power, control, impulse response, and transient handling. A large, next-generation 4" HF compression driver with a titanium diaphragm delivers superior linearity and mid-band clarity.

A horn plug option allows the CC210Wix's 90° x 25° coverage to be adjusted to 70° x 25°. Ultra-precise directivity is ensured by a 3D-printed SEVERIN waveguide, delivering an optimal listening experience across the audience.

CC210Wix can be paired with narrow-dispersion CC210Nix cabinets and 118SG subwoofers for fast, simple system design. Discreet rigging options allow ARROCC systems to be flown horizontally and vertically or mounted to walls and ceilings.

ARROCC CC210Wix is built with pride in Belgium.

## Technical specifications

Description	Wide coverage 2x10" passive constant curvature installation loudspeaker
Transducers	LF: 2x10" • HF: 1x1.5" exit compression driver / voice coil diameter 4"
Frequency range (-6dB)	55Hz - 19kHz
Nominal directivity (-6dB)	90°x25° • External plate option for 70° coverage
Peak SPL (1)	133 dB
Processing	Dedicated AUDIOFOCUS A series and Powersoft Armonia presets
Rigging	Vertical mounting mini beam, hanging bracket
Connectors	2 x 4-point speakON
Nominal Impedance	8ohm
Watt/AES Peak	860/3440W
Dimensions (H x W x D)	626 x 343 x 400mm • 25 x 13,5 x 15,7 inches
Weight	30kg / 66lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood



(1) Mtone 12 dB crest factor

## Subwoofer

---

### 118SG

Ground stack 18" passive subwoofer



Ref. : 48556

## Amplifiers

---

### A 1504 SCiO

4 x 1500W amplifier with DSP



Ref. : 48186

### A 3004 SCiO

4 x 3000W amplifier with DSP



Ref. : 48188

## Accessories

---

48466 CC210W Horn Plug  
48735 210i Mini Beam  
48736 210i U Bracket  
48737 T-Bar

2 x adjustable magnetic plugs to narrow CC210N directivity pattern by 10° per plug  
Mini beam for 2x CC210 installation for vertical mounting  
U-bracket for horizontal suspension, max. 4x CC210i (max)  
Multi purpose H+V directivity control bar



Ref. : 48735





Ref. : 48736





Ref. : 48737

# Beamwidth

## ARROCC CC210Wix 90° beamwidth

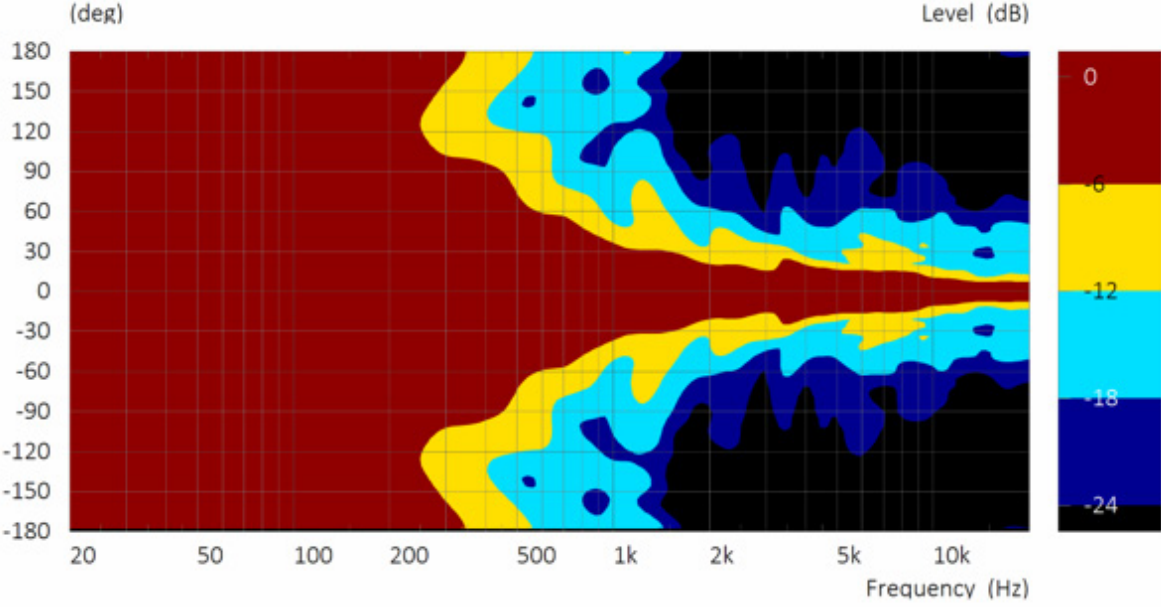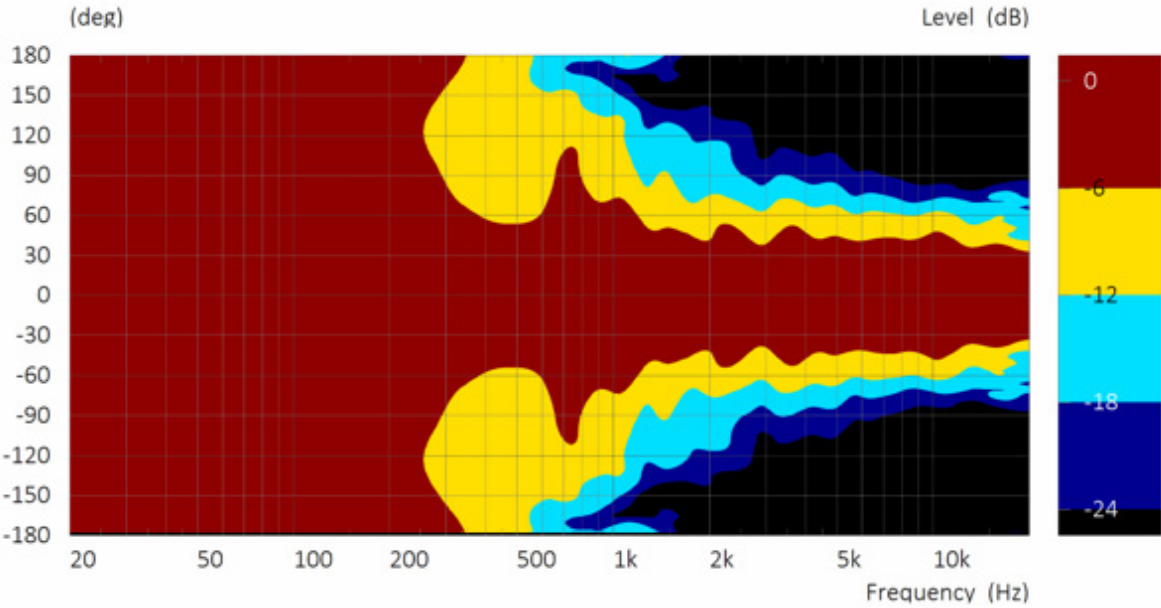

# ARROCC CC210Wix 70° beamwidth

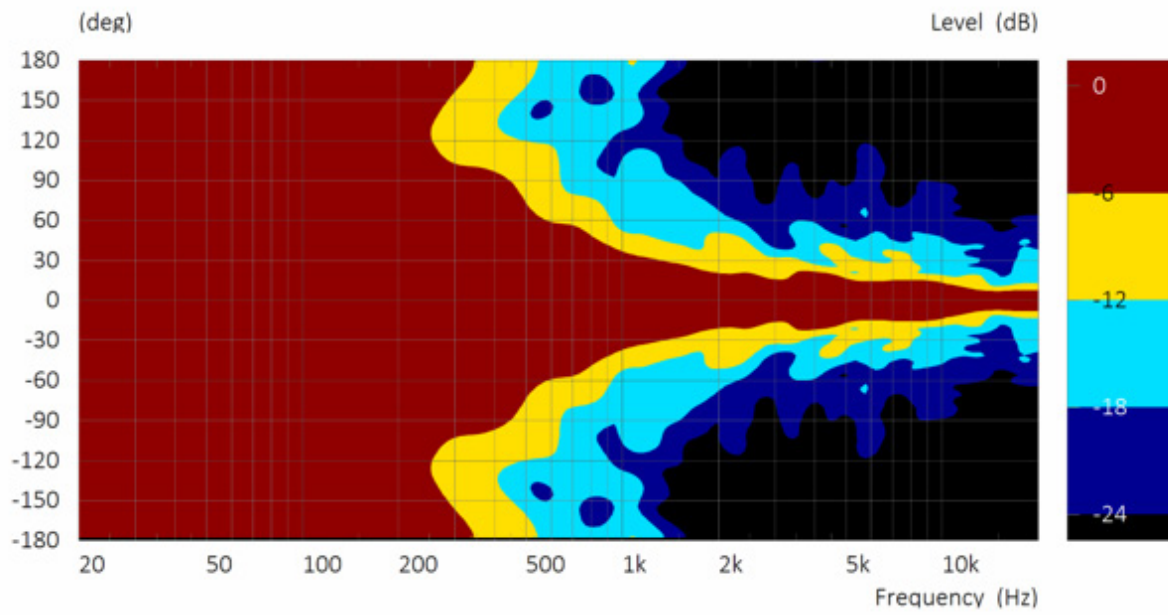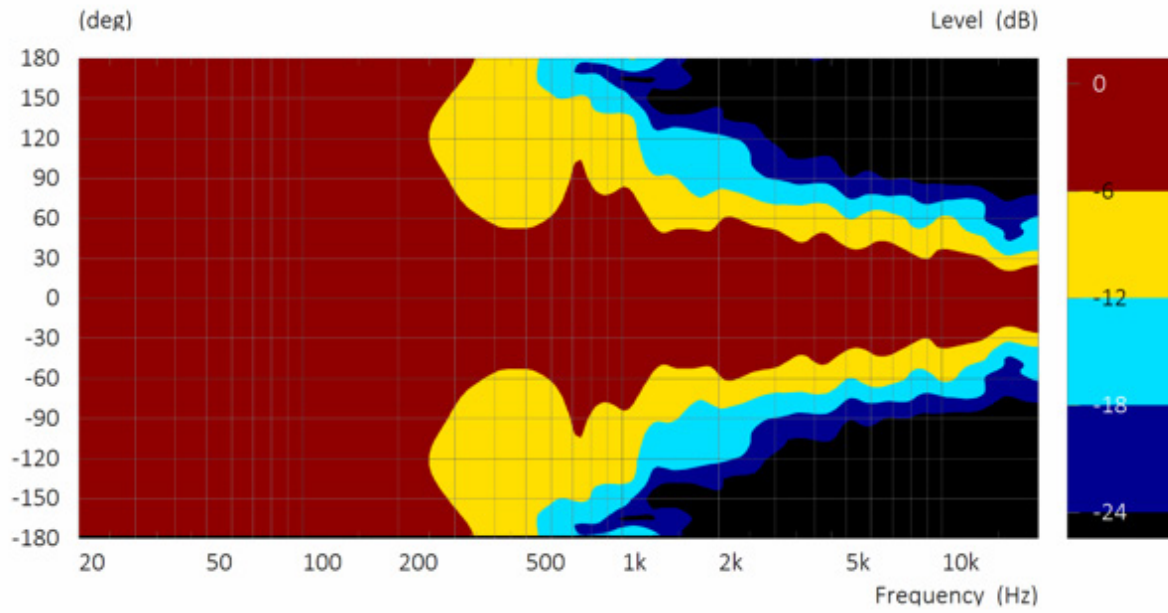

## Contact & Links

---

### Need more information about our products ?

[www.audiofocus.eu](http://www.audiofocus.eu)

[info@audiofocus.eu](mailto:info@audiofocus.eu)

[www.facebook.com/AudiofocusPage/](https://www.facebook.com/AudiofocusPage/)

[linkedin.com/company/audiofocus/](https://linkedin.com/company/audiofocus/)

Scan QR Code to view the ARROCC CC210Wix web page:

