

S 15i More bass. Less space.



S 15i is a compact, high-performance passive installation subwoofer, designed to accompany our VENU series in a wide range of venues requiring high SPL in a discreet, compact package.

S 15i houses a long excursion 15" neodymium driver in a bass-reflex and T-lined design and has the versatility to be deployed stand-alone, stacked or flown to fit the needs of the installation.

S 15i can be quickly deployed in any configuration, including cardioid and end-fire, when used with AUDIOFOCUS A Series amplifiers. Armonia presets are also available for Powersoft amplifiers.

S 15i is built with pride in Belgium and coated in tough, weather-resistant polyurea to safeguard your investment. The cabinet front is protected by a rigid metal grill, backed by acoustically transparent foam.



Up to 7.000



Complete solution



Omni and Cardioid



38Hz-110Hz


Technical specifications

Description	Compact Install 15" subwoofer
Transducers	LF: 1 x 15"
Frequency range (-6dB)	40Hz-110Hz
Peak SPL (1)	132 dB
Processing	Dedicated AUDIOFOCUS and Armonia/Powersoft omni and cardioid presets
Rigging	M8 threaded insert
Connectors	2 x 4-point speakON
Nominal Impedance	8ohm
Watt AES/peak	1000/4000W
Dimensions (H x W x D)	485 x 580 x 520 mm • 19.09 x 22.83 x 20.47 inches
Weight	33.8kg / 74.51lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

(1) Peak level measured at 1 m under free field conditions using pink noise with crest factor 5

Accessories

S 15i side plate

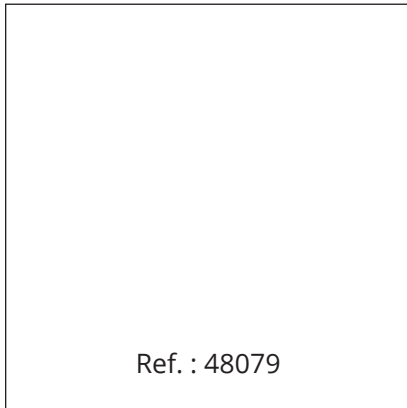

Related Speakers

VENU 8ix

Install 2-way 8" passive point source loudspeaker



Ref. : 48122

S 18i

Installation high performance compact 18" subwoofer



Ref. : 48130

Contact & Links

Need more information about our products ?

www.audiofocus.eu

info@audiofocus.eu

www.facebook.com/AudiofocusPage/

www.facebook.com/groups/AUDIOFOCUS/

Scan QR Code to view the S 15i product's web page.



Follow Us.

