# ARROCC CC210Wx Constant Innovation

(Preliminary information)











Medium throw 90/70° x 25°

5° EEU- 101

CC210Wx is a core element of the ARROCC constant curvature system, mounting twin 10" LF transducers in a V formation and featuring Tetracoil Double Voice Coil technology for exceptional power, precision control, impulse response and handling of transients. A large next-gen titanium diaphragm 4" HF compression driver delivers superior linearity and mid-band clarity.

Thanks to a forthcoming adjustable horn plug option, CC210Wx's wide 90° x 25° coverage can be adjusted to 70° x 25° when desired. ARROCC employs the 3D printed SEVERIN precision waveguide for ultra-precise definition of coverage patterns, achieving the optimal listening experience for all audience members.

CC210Wx (wide) can be freely combined with CC210N (narrow) cabinets, 118S subs and A series amplifiers, forming a flexible, modular solution for every medium throw sound reinforcement scenario. Versatile rigging options allow ARROCC systems to be flown or stacked horizontally and vertically, pole mounted, or fixed to walls or ceilings.


ARROCC CC210Wx is built in Belgium by skilled craftspeople and state-of-the-art machinery.

## **Technical specifications**

Description	Wide coverage 2x10" bi-amp constant curvature loud- speaker
Transducers	LF: 2×10" • HF: 1×1.5" exit compression driver / voice coil diameter 4"
Frequency range (-6dB)	55Hz - 19kHz
Nominal directivity (-6dB)	90°x25° • External plate option for 70° coverage
Peak SPL (1)	135 dB
Processing	Dedicated AUDIOFOCUS A series and Powersoft Armonia presets
Rigging	Horizontal and vertical rigging frames, hanging bracket, and pole mount
Connectors	2 × 4-point speakON
Nominal Impedance	8ohm
Watt/AES Peak	860/3440W
Dimensions (H x W x D)	626 x 343 x 400mm • 25 x 13,5 x 15,7 inches
Weight	30kg / 66lbs
Finish	Highly resistant polyurea coating
Cabinet	High grade birch plywood

# Subwoofer


**118S**Touring passive compact 18" subwoofer




Ref.: 48440


### **Beamwidth**


#### ARROCC CC210Wx 90° beamwidth

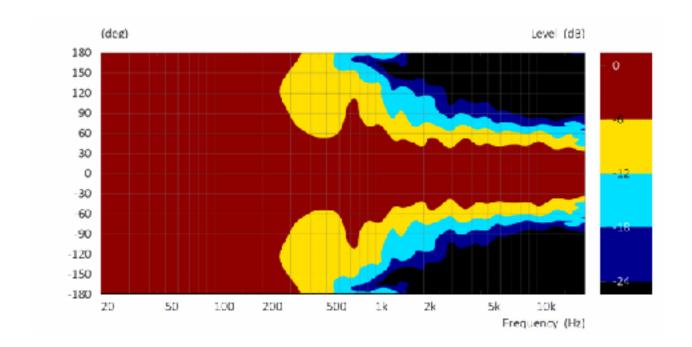

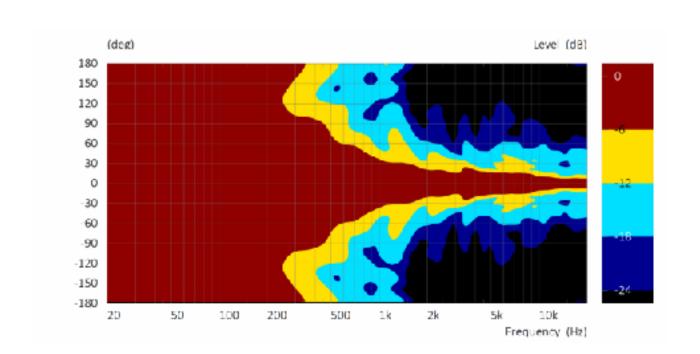

#### ARROCC CC210Wx 70° beamwidth

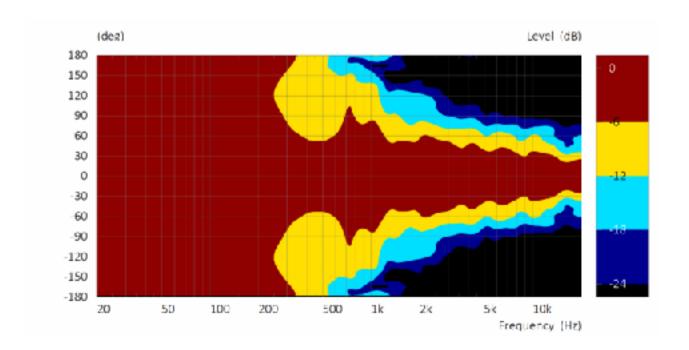

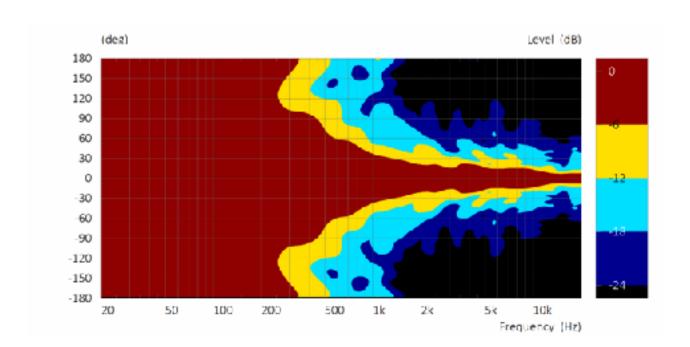

### **Contact & Links**

### Need more information about our products?

www.audiofocus.eu info@audiofocus.eu www.facebook.com/AudiofocusPage/ www.facebook.com/groups/AUDIOFOCUS/

### Scan QR Code to view the ARROCC CC210Wx web page:



#### Follow Us.





